


Quadra Sparkling Specification Sheet



Instant boiling, chilled & sparkling filtered water

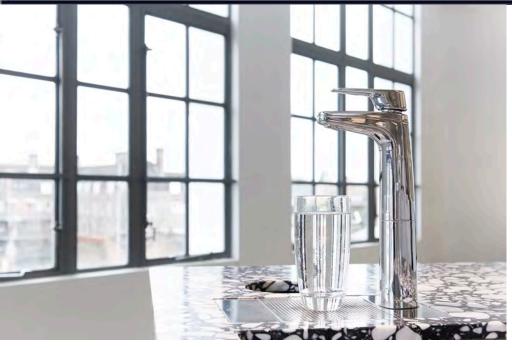

The Billi Sparkling systems are the ultimate drinking water appliances which deliver boiling, chilled & sparkling filtered water instantly. They deliver the following benefits:

Saturated sparkling system

The CO_2 injection system used in the Billi Sparkling range ensures the saturation of CO_2 in the water is high which means it has a better life and, consequently, taste.

Adjustable sparkling water

Adjust the level of sparkling to suit your taste with adjustable controls up to 5 bar of CO_2 pressure.

Adjustable chilled temperature

The new Billi sparkling models have an improved chilling capacity & recovery time. A simple adjustable control knob allows the chilled water temperature to be raised or lowered for chilled and refreshing drinks.

New Ice Bank technology for chilled and sparkling water

Our Ice bank technology has a chilled reservoir where both sparkling and chilled water supply passes through. In doing so, the dispensed water temperature is consistently chilled, also providing a higher level of carbonation.

Safety first

Billi's SplashFree boiling water delivery electronically varies the water flow, slowing momentarily to eliminate splashing as the water first enters the cup. All Billi dispensers are supplied standard with a safety switch.

CO₂ canister can be purchased online at www.billi-uk.com/online.



Quadra Sparkling Specification Sheet

Specifications and guide to standard model selection

Product Number	Description	Suggested no. of persons	Chilled & sparkling cups / hour	Boiling cups / hour	Power required (amps)		Unit Height (mm)	Unit Width (mm)	Unit Depth (mm)
903060	Quadra Sparkling	60	150	B: 180 / C&S: 120	2 x 13	C&S Boiling	385 340	240 180	325 460

Please note: The BCS Sparkling consists of two modules, the Chilled and Sparkling (C&S) module, and the Boiling module. All Models come in a range of dispenser options and finishes. The codes shown on this table are for XL Dispenser in Chrome only. You can view the options and Product Codes here: www.billi-uk.com/howtospecify

Electrical installation requirements The

Quadra Sparkling consists of two modules and both require there own power outlet. Quadra Sparkling requires 2 x 13 amp outlets. It is supplied with a flex cord and plug.

Water supply

1 x 15mm ($\frac{1}{2}$ ") stop-tap with a male thread should be installed in an easily accessible position. Minimum dynamic water pressure of 2.5 bar.

CO₂ Gas Cylinder

The CO_2 gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO_2 and should be installed in a well ventilated area. Each cylinder will provide approx 120L of sparkling water depending on the unit settings. Replacement gas cylinders are available from Billi.

Warranty

All components of the Billi units are covered by a 24 month warranty. Filter cartridges are a consumable and are not covered by warranty, as water conditions and usage vary.

Technical Advice

Contact Billi UK Limited on **020 7456 6789**.

Filtration

Billi have partnered with globally recognised brand Pentair Everpure to create the most technologically advanced filtration for instant boiling and chilled filtered water systems. It removes sediment and chemicals, allows the flow of minerals through without scale build up and suppresses harmful bacteria in the water. Due to the unique Fibredyne™ technology, our filters have a longer life, higher flow rate and lower pressure drop, leaving you with healthy fresh water. All Billi cartridges are certified by NSF International.

Filter changes are made simple by our swing-change system and replacement cartridges are available online at **www.billi-uk.com/online**. Optional sub micron and premium submicron filters are available.


Certifications


Every Billi drinking water appliance is manufactured under a certified quality control system. Billi Sparkling models have been tested and comply with all required standards including: Watermark; License Number 022690; Tested to; ATS5200.105 and AS/NZS4020; AS1428 Accessibility Design Requirements; IS09001 Certificate Number QEC 11627.





Preferred installation layout







As Billi UK Limited has a policy of continual improvement, all details are subject to change without notice. All goods are sold subject to our published terms and conditions. Billi is a registered trademark.