

READY FOR INSTALLATION INFORMATION SHEET

QUADRA PLUS SPARKLING (Water-Cooled)

Before the installation

CABINET SPACE

Width:

Minimum: 600mm

Height:

Minimum: 500mm

POWER

2 x 13amp sockets

Unit supplied with a flex cord and plug.

WATER


2 x 15mm (½") stop-tap with a male thread should be installed in an easily accessible position. Minimum static water pressure of 4 bar with 10 litres per minute flow rate.

WASTE

1½" upstand or an appliance spigot on sink waste.
(only applicable if drainage font is to be installed)



Installation complete QUADRA SPARKLING

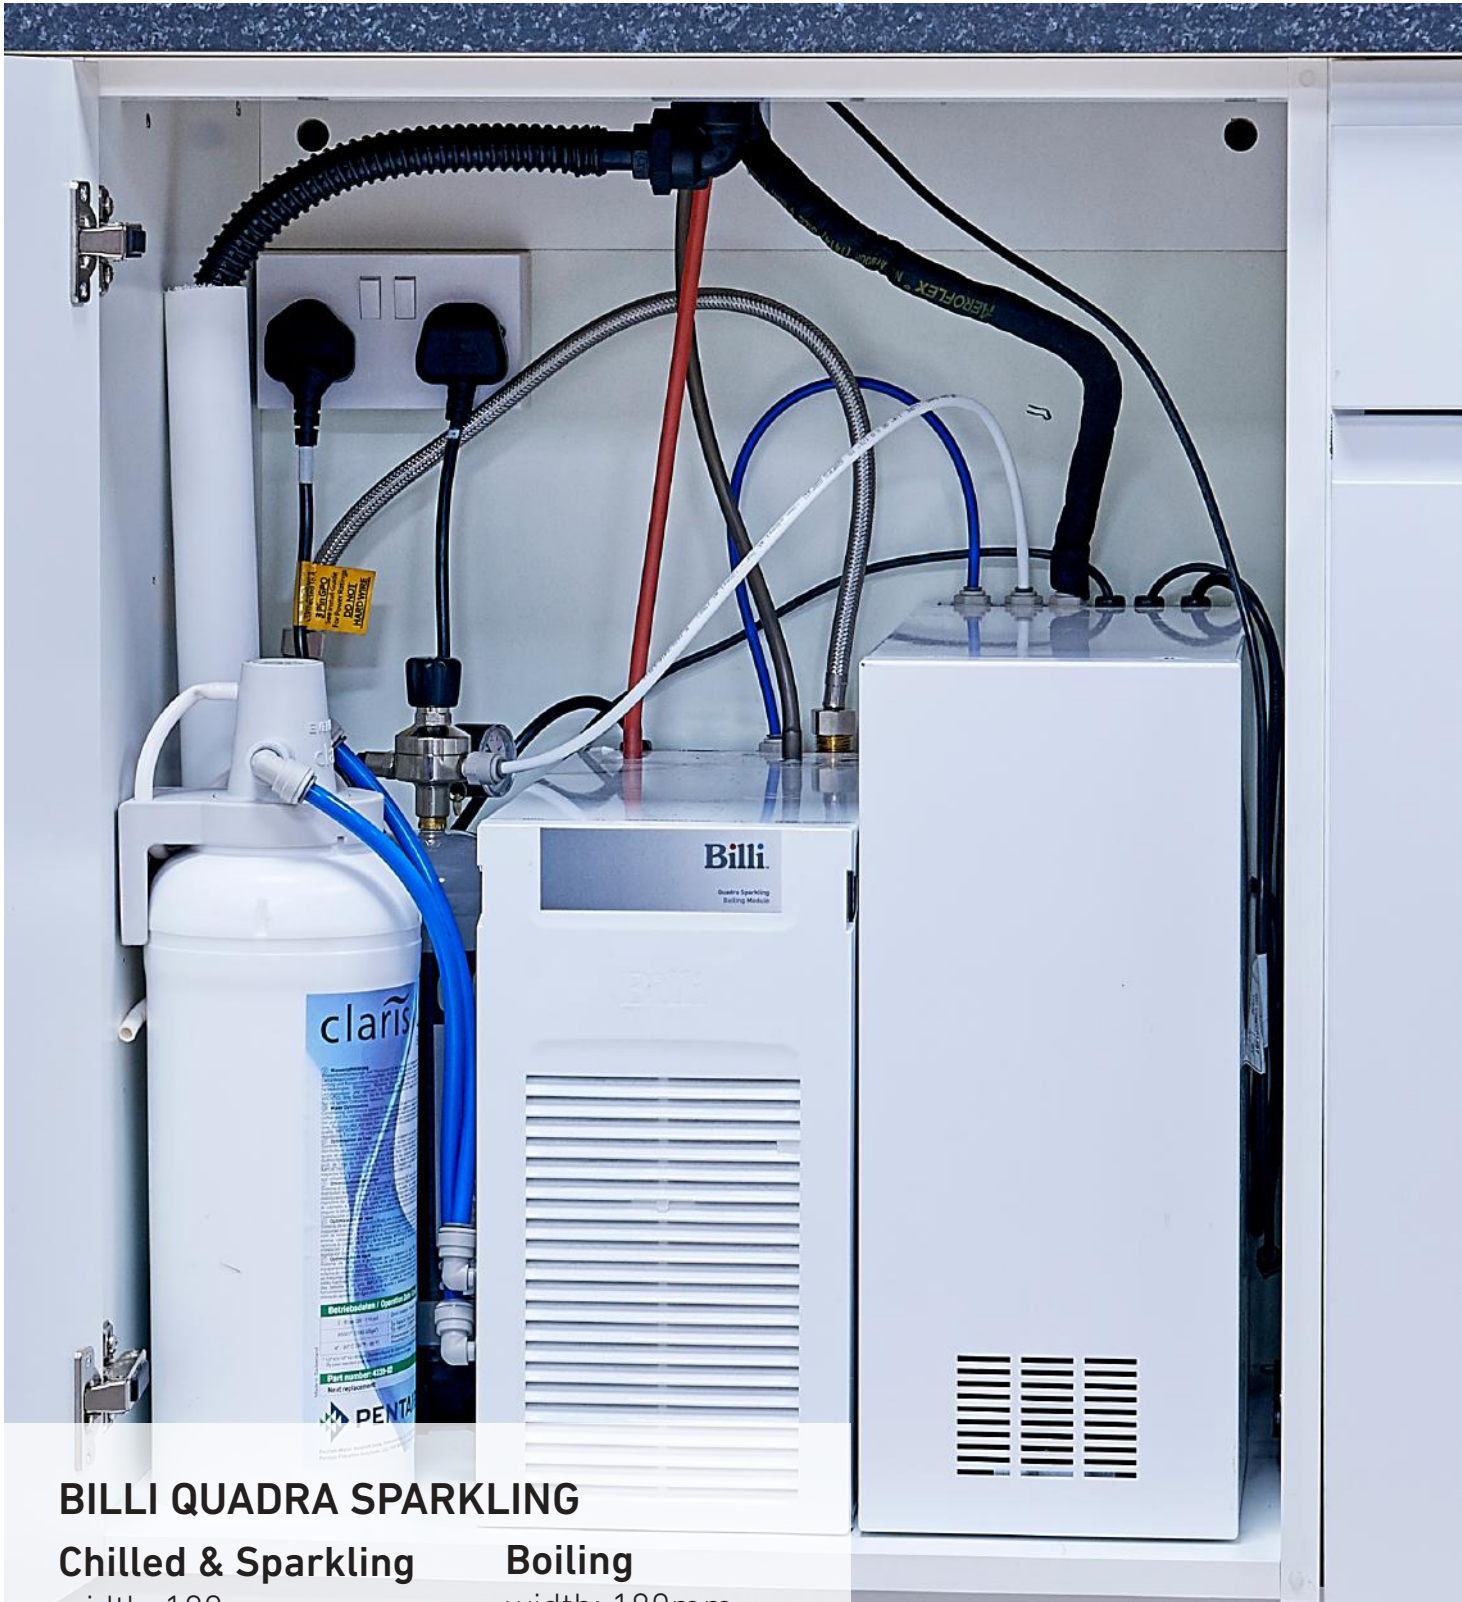

BILLI QUADRA SPARKLING

Chilled & Sparkling

width: 180mm
height: 420mm
depth: 460mm

Boiling

width: 180mm
height: 340mm
depth: 460mm