

COMMERCIAL DATA SHEET

Alpine Spring 80



Billi Alpine Spring 80

The Billi Spring 80 Bottling System is an innovative solution for dispensing high volumes of chilled or sparkling filtered water. This robustly built system is constructed of durable stainless steel, making it easy to clean & maintain. Easy to install as a single compact under bench system, the Alpine Spring 80 pairs the ease of use and convenience of refreshing water at your fingertips with high capacity, hospitality styling while also reducing your environment impact.

Paired with our Classic Tap, the system is capable of dispensing volumes of up to 80L/hour.



CHILLED



SPARKLING

Classic Tap



Alpine Sparkling Under-Bench Unit



Features



SPACE SAVING DESIGN



EASY INSTALLATION



ADJUSTABLE CHILLED TEMPERATURE



ADJUSTABLE SPARKLING LEVEL

* Indicative image only

PRODUCT SPECIFICATIONS

Water type	Product code	Model name	Dispenser	Capacity (per hour)	Power supply (amps)
<p>CHILLED SPARKLING</p>	890080	Alpine Spring 80 Ltr	Classic Tap	Up to 80 litres	13

Accessories

Chilled & Sparkling Decals (included)

101801 Drip Tray

100872 Everpure Filter

996911 Twin Pack CO2





Finishes

Standard Finish


CH - Chrome

TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

PRODUCT DIMENSIONS

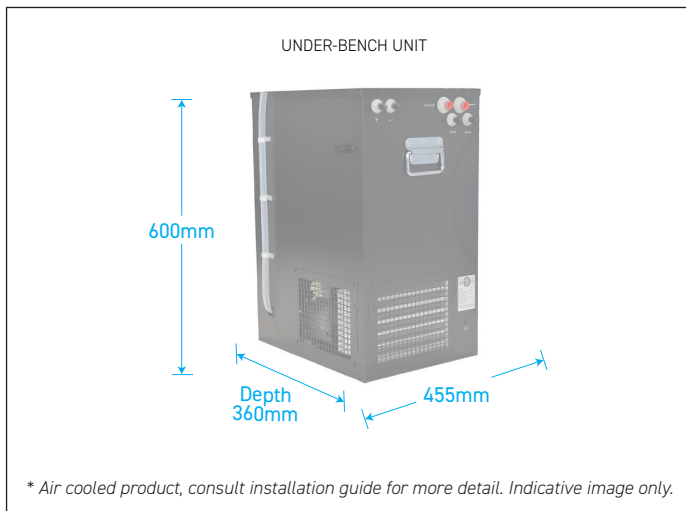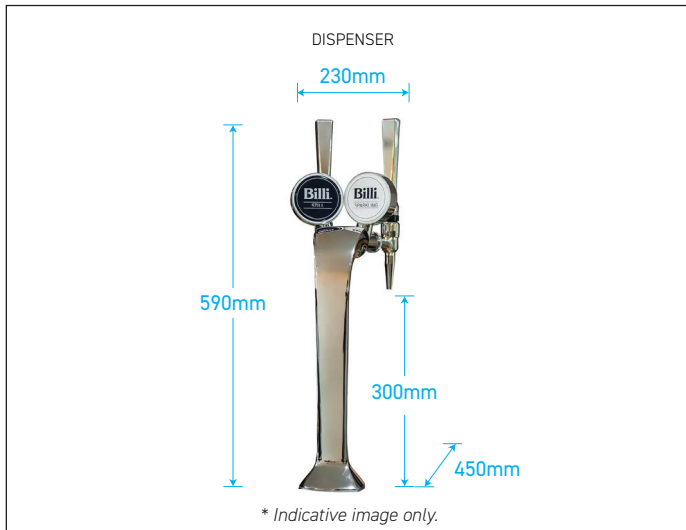

PREFERRED INSTALLATION LAYOUT

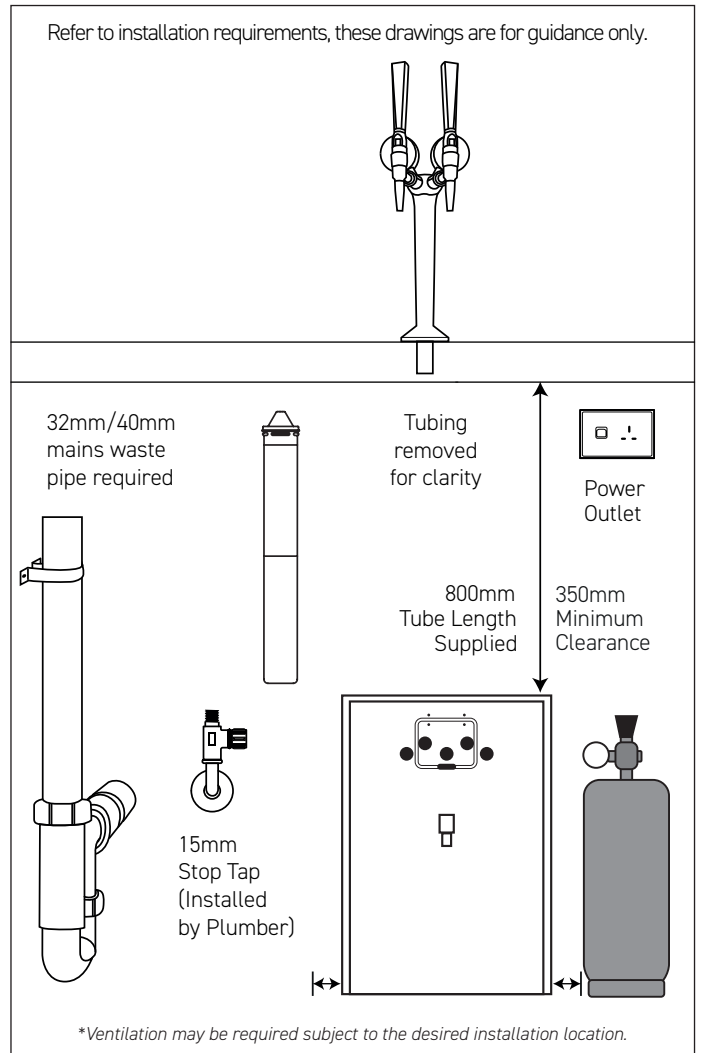

WATER SUPPLY

An accessible drinking water supply from a 15mm pipe with a minimum pressure of 2.5bar static and 6 litres a minute flow should be located in the base unit of the installation location. Water supply should be certified as microbiologically safe to drink.

POWER SUPPLY

A 13amp single switched socket must be positioned at a high level and accessible within the cupboard. The unit comes with a 1 meter flex cord and plug.

WARRANTY

The Billi Alpine Sparkling Range is covered by a comprehensive 2 year warranty on all parts and labour.

WASTE REQUIREMENTS

A 32mm/40mm mains waste pipe is required within the base unit. Waste is not required if your drip tray is suitable for emptying manually. If your drip tray is connected to waste, a 32mm/40mm mains waste pipe is required within the base unit of installation. This pipe should include a trap or u-bend to prevent any unpleasant odours. A spigot connection is also acceptable.

CERTIFICATIONS AND COMPLIANCE*

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: WELL Cornerstone Member; BREAMM compliant; LEED compliant.

* Drawings are for guidance during specification, refer to Installation requirements for final install. All efforts are made to ensure Certifications & Compliance claims are current, however this is subject to change without notice.

Billi™

Billi UK Limited Pty Ltd
University Of Wolverhampton Science Park,
Technology Centre, Glaisher Drive,
Wolverhampton, WV10 9RU

P 020 7456 6789
E marketing@billi-uk.com
W www.billi-uk.com



visit us at

