

# COMMERCIAL DATA SHEET

## Alpine 125 XT Touch

# Billi™

### Billi Alpine 125 with XT Touch Dispenser

Enjoy refreshing chilled or a continuous supply of ambient temperature filtered water.

Billi's Alpine 125 offers a premium filtered drinking water experience to account for all preferences.

The XT touch is an innovative dispenser, featuring a contemporary design incorporating a touch panel to offer a sophisticated and clean style.



STILL



CHILLED



Up to 40

XT Touch Dispenser



Alpine Under-Bench Unit



### Features



SPACE SAVING  
DESIGN



ENERGY  
EFFICIENT



NO CUPBOARD  
VENTILATION  
REQUIRED



UNLIMITED  
FILTERED  
WATER



WATER  
COOLED  
TECHNOLOGY



ADJUSTABLE  
CHILLED  
TEMPERATURE



CHOICE OF  
DISPENSER  
DESIGNS

## PRODUCT SPECIFICATIONS

| Water type                                                                                                                                                                                 | Product code | Model name | Dispenser | Suggested no. of people | Chilled water delivery (cups per hour) | Still water delivery (cups per hour) | Power supply (amps) |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------------|-----------|-------------------------|----------------------------------------|--------------------------------------|---------------------|
| <br>STILL <br>CHILLED | 932125TUK    | Alpine 125 | XT Touch  | Up to 40                | 120                                    | unlimited                            | 13                  |

### Accessories

**992803** - 120mm Riser & Font

**990720** - Tubing Extension Kit for X series dual temp dispensers 2mtrs



### Finishes

Standard Finishes

CH - Chrome

BR - Brushed

MB - Matte Black


Special Order Finishes

MW - Matte White


Add the relevant Finish Code and the Country Identifier (UK) to the Product code to complete your specification eg 932125TUK

# TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

## PRODUCT DIMENSIONS

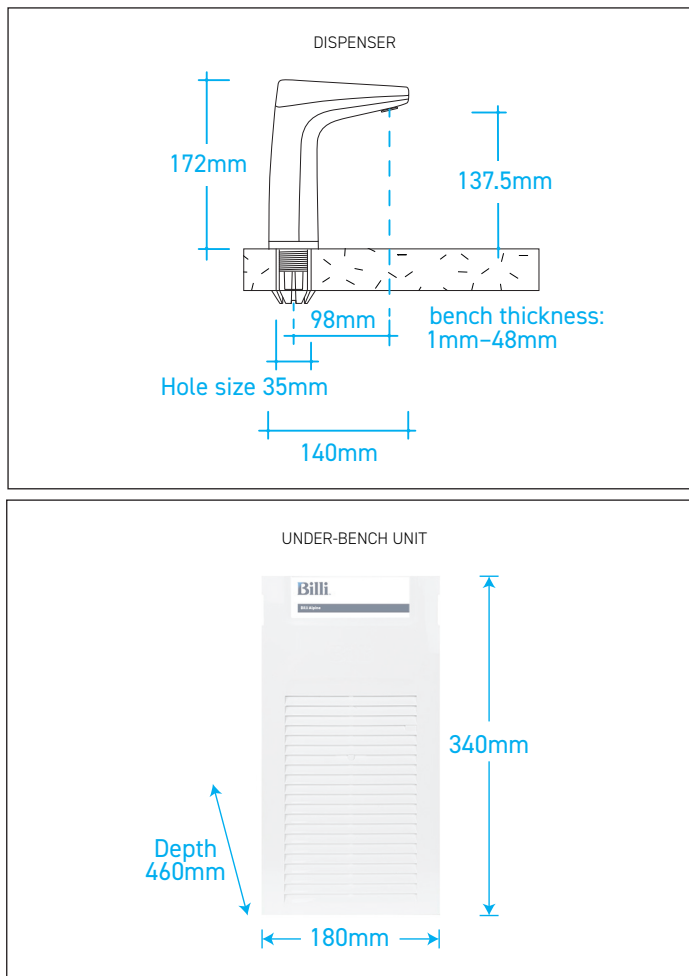

## PREFERRED INSTALLATION LAYOUT

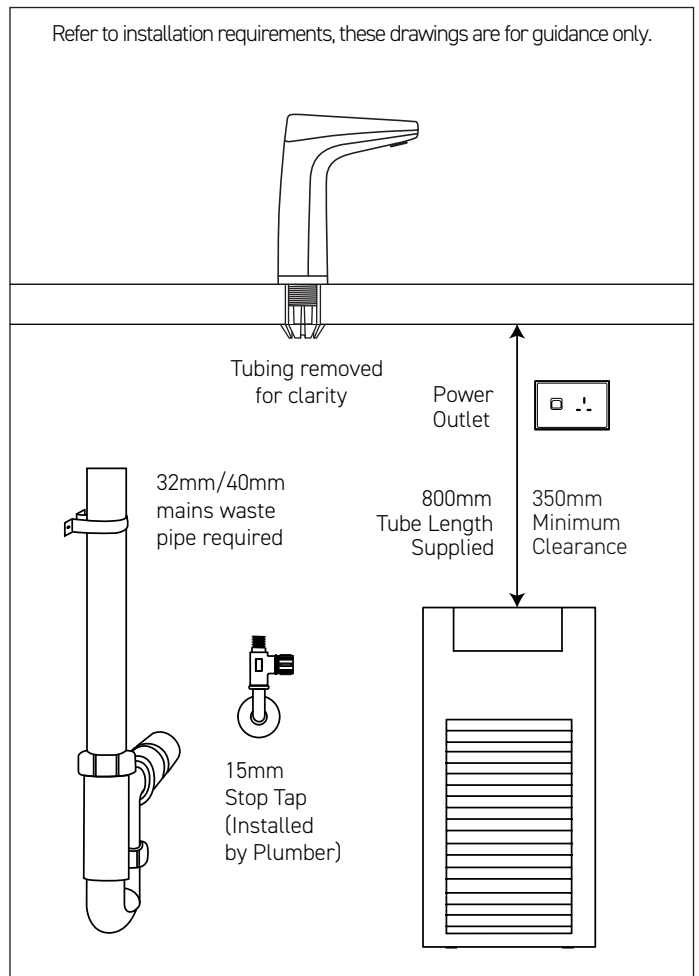

### WATER SUPPLY

An accessible drinking water supply from a 15mm pipe with a minimum pressure of 2.5bar static and 6 litres a minute flow should be located in the base unit of the installation location.

### POWER SUPPLY

A 13amp single switched socket must be positioned at a high level and accessible within the cupboard. The unit comes with a 1 meter flex cord and plug.

### WASTE REQUIREMENTS

A 32mm/40mm mains waste pipe is required within the base unit. This pipe should include a trap or u-bend to prevent any unpleasant odours. If there is a spigot waste connection, two spigots are required to connect to the waste and condenser line.

### WARRANTY

The Billi Alpine Range is covered by a comprehensive 2 year warranty on all parts and labour.

### FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology which provide superior taste, water quality, consistent filter life and peace of mind on the topic of hygiene.

Supplied: 994051 (5 micron).

### CERTIFICATIONS & COMPLIANCE\*

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: ISO 9001:2015, QEC 11627; WRAS certified; WELL Cornerstone Member; BREAMM compliant; LEED compliant.

*\* Drawings are for guidance during specification, refer to Installation requirements for final install. All efforts are made to ensure Certifications & Compliance claims are current, however this is subject to change without notice.*

# Billi™

### Billi UK Limited

University Of Wolverhampton Science Park,  
Technology Centre, Glaisher Drive,  
Wolverhampton, WV10 9RU

**P** 020 7456 6789  
**E** marketing@billi-uk.com  
**W** www.billi-uk.com

visit us at

